






ACP 40 , 标准版本 , 单相 , 手动气镇

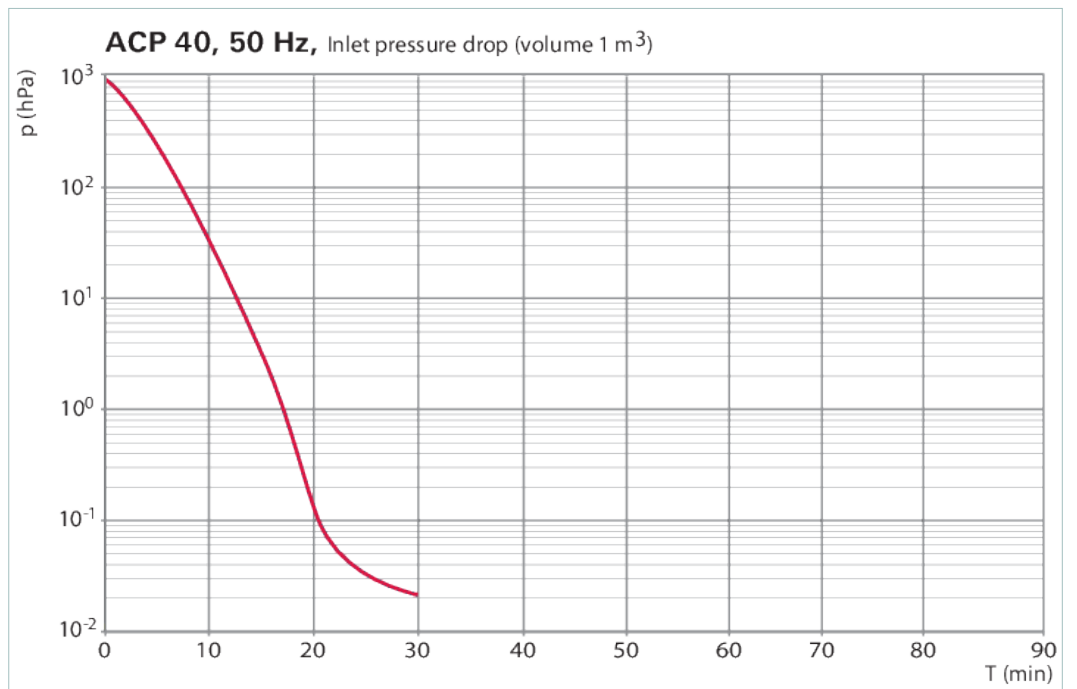

ACP 40 , 标准版本 , 单相 , 手动气镇

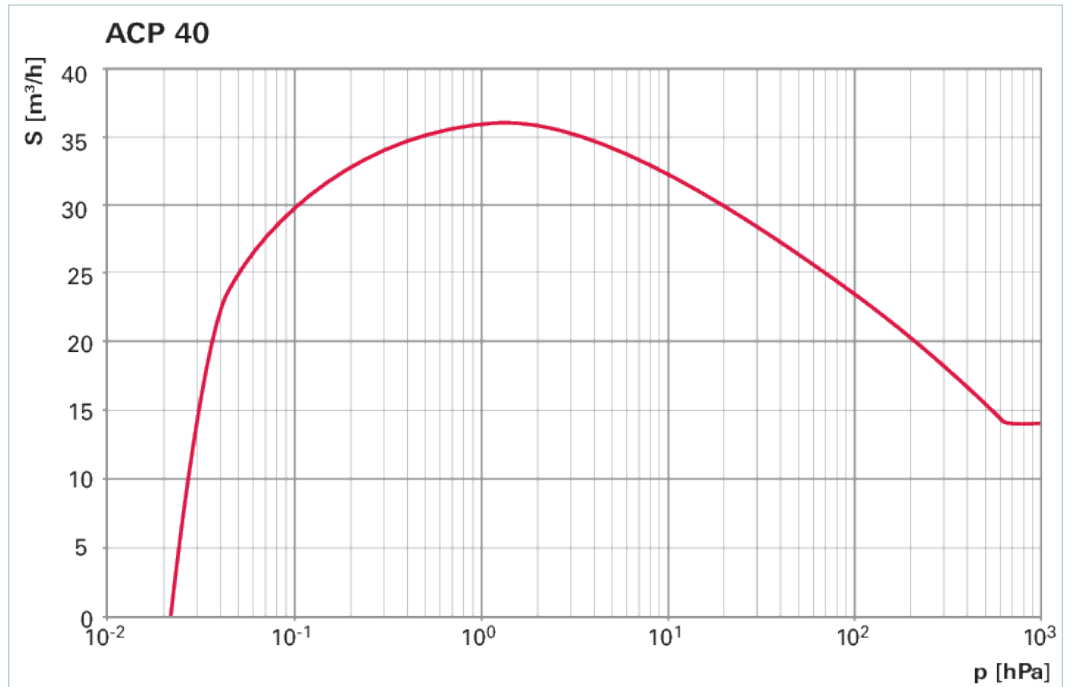

尺寸

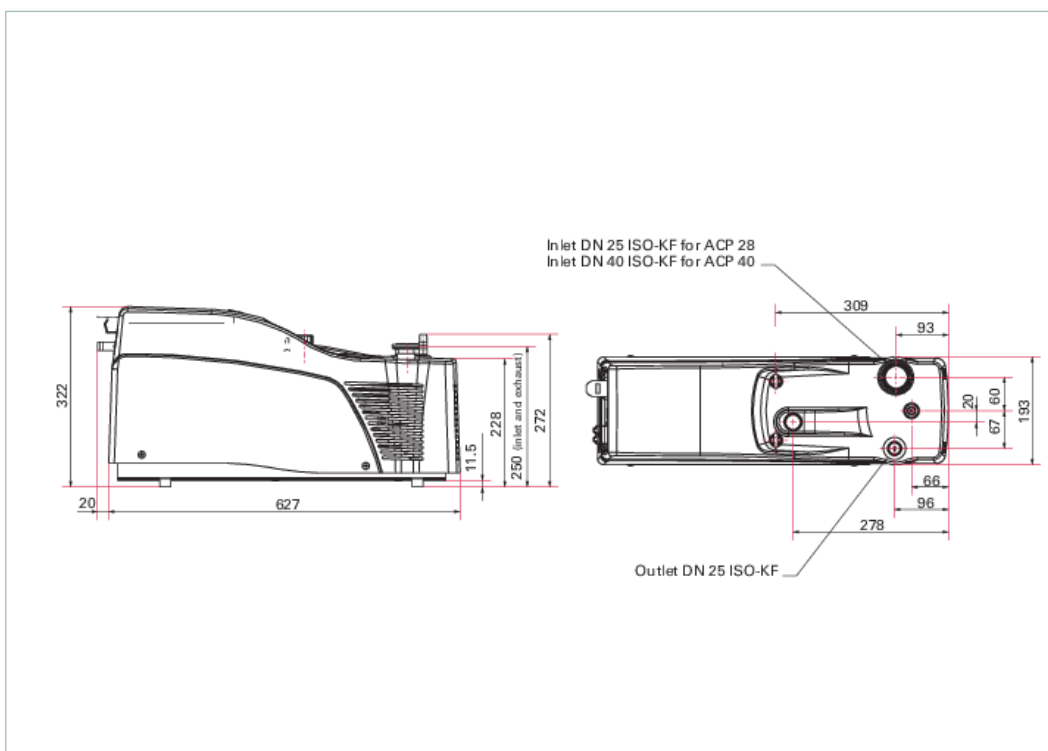

技术参数	ACP 40, 标准版本, 单相, 手动气镇
冷却类型	空气
声压水平	65 分贝 (A)
尺寸 (长 x 宽 x 高)	647 x 193 x 322 毫米
抽速	37 m/h 21.78 cfm 616.67 l/min
最大氦气泄漏率	5 10^{-7} hPa l/s 3.75 10^{-7} Torr l/s 5 10^{-7} mbar l/s
最大水蒸气容积	120 g/h
最大连续进气压力	1013 百帕
最终压力时的功率消耗	700 瓦
最高排气压力	1200 百帕
气镇	是
气镇流量	2.4 m/h 1.41 cfm 40 l/min
版本	标准
环境温度	12 – 40 摄氏度
电源电缆	是, EU 电源线
电源连接:	110 – 230 ($\pm 10\%$) V AC 50/60 Hz
电源连接:频率(范围)	50/60 Hz
过程	清洁制成工艺
连接法兰 (入口)	DN 40 ISO-KF
连接法兰 (出口)	DN 25 ISO-KF
重量	32 千克

订单号	
ACP 40, 标准版本	V8SACSGEMF

配件	
ISO-KF, 焊接波纹管	
高真空角阀, DN 40 ISO-KF, 手动, 不锈钢/氟橡胶, “ A ” 尺寸 65 mm	ESV-S04100
保护 灰尘分离器/入口粒子过滤器	
入口粒子过滤器 IPF 40, DN 40	111647
降噪 降噪盖	
NRC 28/40, 用于 ACP 28 和 ACP 40 泵	112637
隔声室套件 SEK 28/40, 用于 ACP 28 和 ACP 40 泵	114379
降噪 排气消声器	
外部消声器 ES 25 S, DN 25	109873

VACUUM SOLUTIONS FROM A SINGLE SOURCE

Pfeiffer Vacuum stands for innovative and custom vacuum solutions worldwide, technological perfection, competent advice and reliable service.

COMPLETE RANGE OF PRODUCTS

From a single component to complex systems:

We are the only supplier of vacuum technology that provides a complete product portfolio.

COMPETENCE IN THEORY AND PRACTICE

Benefit from our know-how and our portfolio of training opportunities!

We support you with your plant layout and provide first-class on-site service worldwide.

Are you looking for a
perfect vacuum solution?
Please contact us:

Pfeiffer Vacuum GmbH
Headquarters · Germany
T +49 6441 802-0
info@pfeiffer-vacuum.de

www.pfeiffer-vacuum.com

All data subject to change without prior notice.