



AVC 040 SA, angle valve, manually actuated


AVC 040 SA



AVC 040 SA, angle valve, manually actuated

- Quick opening by partly turning the rotary knob
- Bellows-sealed
- With visual indication of open and closed positions
- Service life: 10,000 operating cycles
 The valve must always be fully opened/closed (locked)

Dimensions

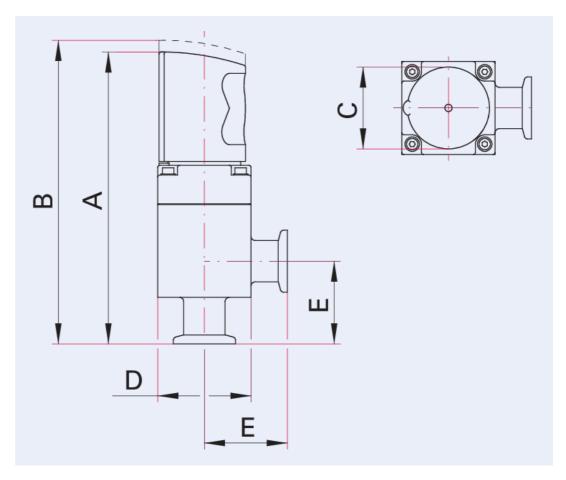

AVC 040 SA

valve, DN 40 ISO-KF

Technical Data	AVC 040 SA, angle valve, manually actuated
Feedthrough	Stainless steel Bellows
Seal	FKM
Housing	Aluminum
Actuator	Quick opening & closing
Tightness	1 · 10 ⁻¹⁰ Pa m ³ 1.33 · 10 ⁻⁸ 1 · 10 ⁻⁸ /s Torr l/s mbar l/s
Bakeout temperature: actuator	50 °C 122 K -223.15 °F
Conductance value with molecular flow	45 l/s
Operating pressure min.	1 · 10 ⁻⁸ hPa 7.5 · 10 ⁻⁹ Torr 1 · 10 ⁻⁸ mbar
Pressure max. (absolute)	1,500 hPa 1,125 Torr 1,500 mbar
Bakeout temperature: housing	80 °С 176 K -193.2 °F
Differential pressure in closing direction	2,000 hPa 1,500 Torr 2,000 mbar
Differential pressure in opening direction	1,500 hPa 1,125 Torr 1,500 mbar
Weight	0.85 kg 1.87 lb
Operating pressure min.	1 · 10 ⁻⁸ hPa
Pressure max. (absolute)	1,500 hPa
Connection flange	DN 40 ISO-KF
Differential pressure in closing direction	2,000 hPa
Differential pressure in opening direction	1,500 hPa
Weight	0.85 kg
Order number	AVC 040 SA, angle valve, manually actuated
AVC 040 SA, angle valve, manually actuated	PF A51 003
Accessories	AVC 040 SA, angle valve, manually actuated
Set of seals for AVC/DVC valve, DN 40 ISO- KF	PT 130 302 -T
Corrugated bellows, complete for AVC/DVC	PT 130 305 -T



Your Success. Our Passion.

We give our best for you every day worldwide!



Are you looking for an optimum vacuum solution? Talk to us: Pfeiffer Vacuum GmbH Germany

T+49 6441 802-0

Or scan the barcode, to visit our web page:



https://webportal.pfeiffer-vacuum.com/global/en/contact



Follow Us On Social Media #pfeiffervacuum















www.pfeiffer-vacuum.com